


- > dry contact relays (Automation Systems)
- > momentary paddle switch

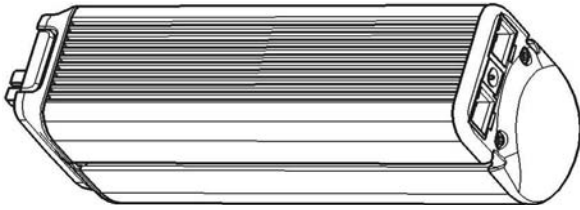

Connectors: > For connecting infrared/switch/BUS cables

B	Black	LED	PIN 3
	Red	GND	PIN 4
	Green	OPEN	PIN 5
	Yellow	CLOSE	PIN 6

RJ45

Connect wires necessary only

Switching

- > **Open** and **Close** should not be activated simultaneously. If so, the motor unit will switch to the programming mode.
- > pulse < 1.2 sec: automatic complete open / close / stop
- > pulse > 1.2 sec: the system runs until button is released
- > Bounce time lower than 0,04 sec required
- > The switching current is +/- 5.5mA
- > 24 VDC out pin2 and pin4: max. 2.4VA
- > Potential free switching only

24 VDC Power Supply

6230-1100 6230-1200-US

- LED > Lights up in green or red
- > Gives feedback while programming the motor unit: see annexe B4 for an overview of the LED signals.

